

MEASURE & INSTALL


Blocking

THINGS TO KNOW


Blocking provides structural support within a wall or ceiling.

DRAPES

CEILING MOUNT

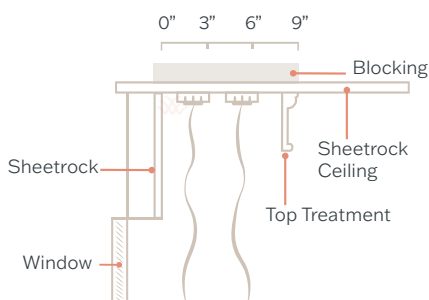


WALL MOUNT

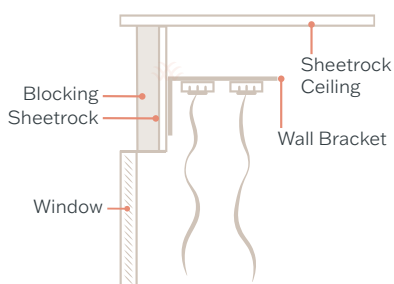


SHADES

INSIDE MOUNT

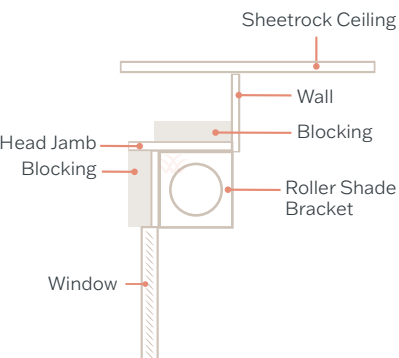

OUTSIDE MOUNT

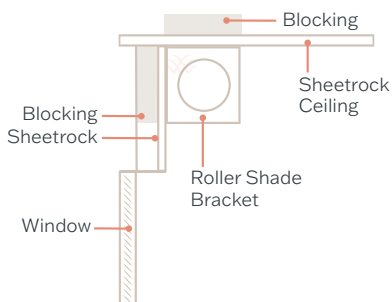

SPECIFICATIONS

1. Blocking should be at least 3/8" thick and structurally supported.
2. Blocking should be continuous for the width of the treatment provided.
3. Blocking location (either wall or ceiling) to be determined by installation location (usually determined by specifications).
4. Ceiling blocking to be 3" in depth per treatment, wall blocking to be 5" tall.